

Model 20 Flake Ice Maker

Built for industrial use with high quality, heavy-duty parts, all North Star flake ice makers are constructed to be dependable and durable. The Model 20 ice maker is available in three stainless steel configurations – the Elite, Plus and Standard -- for use in all types of food processing. Each of these configurations produce superior, sub-cooled flake ice for industrial applications.

Feature	Benefit
North Star's lifetime evaporator warranty	• The best warranty in the business.
Makes sub-cooled flake ice	• Superior ice for most industrial applications the greatest surface area coverage for faster, more efficient cooling.
Stainless steel components incorporated in the design (varies depending on model)	 The smart choice for food safety and sanitation, will not corrode, low maintenance requirements.
Makes ice from fresh water or salt water	 Used worldwide in seafood processing, meat and poultry processing, concrete cooling and other industries
Solid stainless steel freezing surface Elite, Plus & Standard models	 Long-lasting, durable and easy to clean. Will not chip, flake, pit or corrode like chrome-plated freezing surfaces.
Double-walled, stationary evaporator design	• No refrigerant seals to leak.
Constructed to ASME and PED codes	• Meets international safety require- ments for pressure vessels.
Operates continuously with no defrost cycle	• All energy goes to making ice.
High R-Value polyurethane insulation and reinforced fiberglass exterior	• Energy efficient and durable.
North Star designed drip shield	• Complete separation of water and ice. No water is wasted.
Simple installation and operation	• Easy to use with minimal mainten- ance requirements.






Model 20 Flake Ice Maker

Ice Maker Specifications

High Capacity with a Small Footprint

Refrigerant Control: RFS (Refrigerant Float Switch) (Preferred) or Sporlan Levelmaster. Forced recirculation models also available

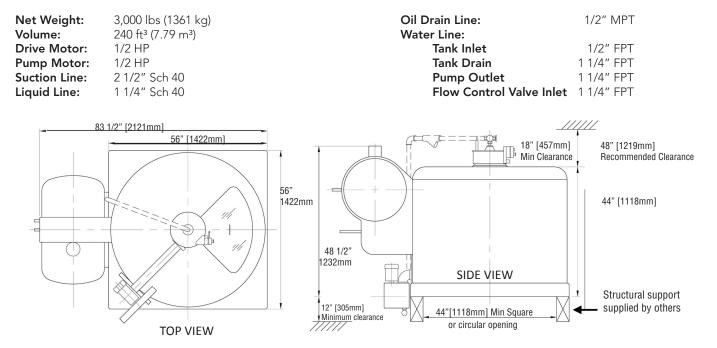

Refrigerant Capacity at 70°F (21°C)Refrigeration RequirementVolume 8.68 Cubic Feet (.25 Cubic Meters)Tons of Refrigeration Per Ton of Ice

Freon R-134a	175 lbs (79 kg)	Freon R-404a	166 lbs (75 kg)	Water Temp. °F Tons of Ref (UST)	40 1.20	50 1.25	60 1.30	70 1.40	80 1.50
Freon R-22	159 lbs (72 kg)	Ammonia R-717	80 lbs (36 kg)	Water Temp. °C kW of Ref (MT)	5.0 4.67	10 4.84	15.5 5.02	21 5.44	27 5.91

Flake Ice Capacities in US Tons (Metric Tons)

Evap. Temp F	0	-5	-10	-15	-20	-25	-30	-35
- C	-18	-21	-23.5	-26	-29	-32	-34.5	-37
Stainless Steel Models 1.5mm Ice Thickness 2.0mm Ice Thickness	7.2 (6.8) 6.0 (5.5)	8.3 (7.9) 7.0 (6.4)	9.4 (8.7) 7.8 (7.1)	10.3 (9.4) 8.6 (7.8)	11.0 (10.0) 9.2 (8.4)	11.5 (10.4) 9.5 (8.6)	11.5 (10.4) 9.6 (8.6)	11.7 (10.6) 9.7 (8.8)

Above capacities based on 60°F (15.5°C) make-up water and oil-free ammonia refrigerant. For different operating conditions including halocarbon refrigeration, please visit the North Star Website and use our Ice Maker Selector Tool at: www.northstarice.com.

North Star Ice Equipment Corporation

8151 Occidental Avenue South P.O. Box 80227 Seattle, WA 98108 USA Tel: 206-763-7300

Toll-free in USA: 1-800-321-1381 Fax: 206-763-7323 Email: info@northstarice.com



www.northstarice.com

© 2010 North Star Ice Equipment Corporation Printed in USA. 12.10.1